



NUCTECH™ CX120200D

X-ray Inspection System

EN



Introduction

The NUCTECH™ CX120200D X-ray Inspection System, is specially designed to conduct non-intrusive security inspection toward airline service trolleys. It employs dual energy X-ray imaging technology as well as dual-view design, which offers a much more effective inspection solution towards airline trolleys for aviation industry.

The CX120200D has a tunnel opening of 1250mm wide by 2010mm high, which covers the screening demands for typical full-size and half-size airline trolleys, as well as most user-customized aircraft trolleys and containers. The conveyor system is designed based on the mechanical characteristics of the airline trolleys, in order to guarantee a safe and smooth delivery of the trolley during the inspection process.

Technical Features

- Provide high-efficiency, non-intrusive security inspection for airline trolleys and containers.
- High image quality with wire resolution of 38 AWG and steel penetration of 44mm.
- Dual-view x-ray imaging design provides improved inspection efficiency.
- Specially designed conveyor system with load capacity up to 750kg.
- High throughput up to 144 full-size trolleys per hour.
- The radiation leakage comply with all published international health and safety standards.

Technical Specifications

General Specifications

Tunnel Dimensions	1250mm(W) × 2010mm(H)
Conveyor Speed	0.20m/s
Conveyor Height	400mm
Max. Load	750kg

Image Performance

Wire Resolution	38 AWG
Steel Penetration	44mm
Display Resolution	1280 × 1024

Image Processing System

Image Enhancement	Color/BW, negative, high/low penetration, organic /inorganic stripping, general enhancement, multi-absorptivity, and suspect material enhancement, etc.
Material Classification	According to atomic number signatures
ROI & Zoom	Step/stepless zoom, up to 64 times enlargement
Image Recall	Preceding images recallable
Image Storage Capability	Up to 100,000

Miscellaneous Functions

Standard Functions	Time/date display, counters, user management, system-on/X-ray-on timers, power on self test, built-in diagnostic facilities, dual-direction scanning, system log, system standby and training, etc.
Optional Functions	Explosives/narcotics detections, high-density area alert, threat image projection (TIP)



Health and Safety

X-ray Leakage	Less than 1μSv/h (10cm from the housing), complying with all published international standards
Film Safety	Guaranteed for high speed film up to ASA/ISO1600 (33DIN)

Installation Data

Dimensions	5736mm(L) × 2500mm(W) × 2735mm(H)
Weight	5000kg
Storage Temperature / Humidity	-40°C ~ +60°C / 5% ~ 95% (non-condensing)
Operating Temperature / Humidity	0°C ~ +40°C / 5% ~ 95% (non-condensing)
Power Supply	220VAC ~ 240VAC (-15% ~ +10%), 50 Hz/60Hz ±3Hz
Power Consumption	2.5kVA

Note: Image performance specifications are based on test piece complying with CAAC standard.

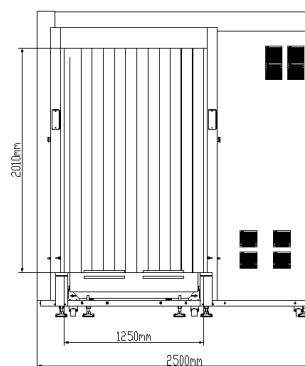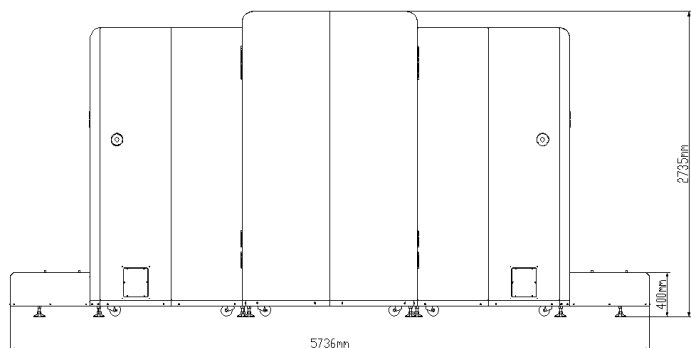

NUCTECH COMPANY LIMITED
Address: 2/F Block A, Tongfang Building,
Shuangqinglu, Haidian District,
Beijing 100084, P.R.China
Tel: +8610 50980999
Fax: +8610 62788896

Copyright ©2021 NUCTECH COMPANY LIMITED. All rights reserved.
Design and specifications are subject to change without notice.
Printed in CHINA, Apr 2021.

210427



NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF QUALITY MANAGEMENT SYSTEM (ISO 9001:2015)
NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF ENVIRONMENTAL MANAGEMENT SYSTEM (ISO 14001:2015)
NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT SYSTEM (OHSAS 18001:2007)

